

OMAM, a collection designed by Philipp Weber, translates and materialises the rhapsodic dance of glass blowing. Each bespoke product is shaped according to the gestures of the human body in action.



FACTSHEET

OMAM

PENDANT LIGHT

# ANALOG




## DISCLAIMER

Please keep in mind, that the OMAM pendants are individually handblown by our skilled glassblowers. Therefore measurements of the body can vary.


## OMAM PENDANT

size	15-20 cm
weight	3-5 kg
material	blown glass
cable lengths	2000/3000/5000 mm

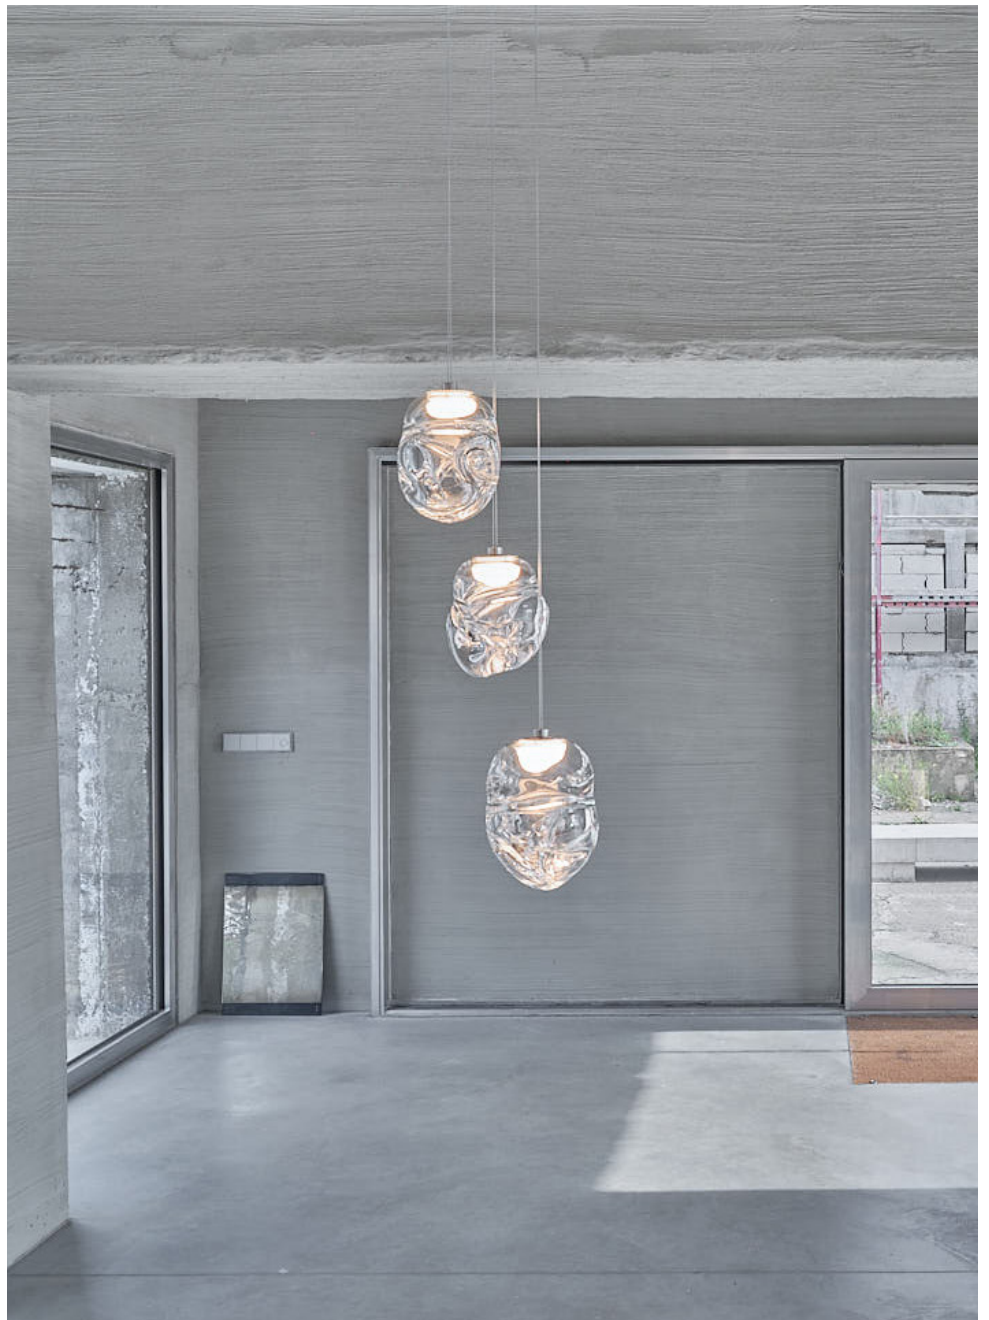



## CHOOSE YOUR LENGTH

The cable lengths are available in 2 m, 3 m and 5 m. Choose your preferred length, based on your ceiling height. The vertical distance between the pendants has to be arranged individually, we recommend a spacing of 20cm.

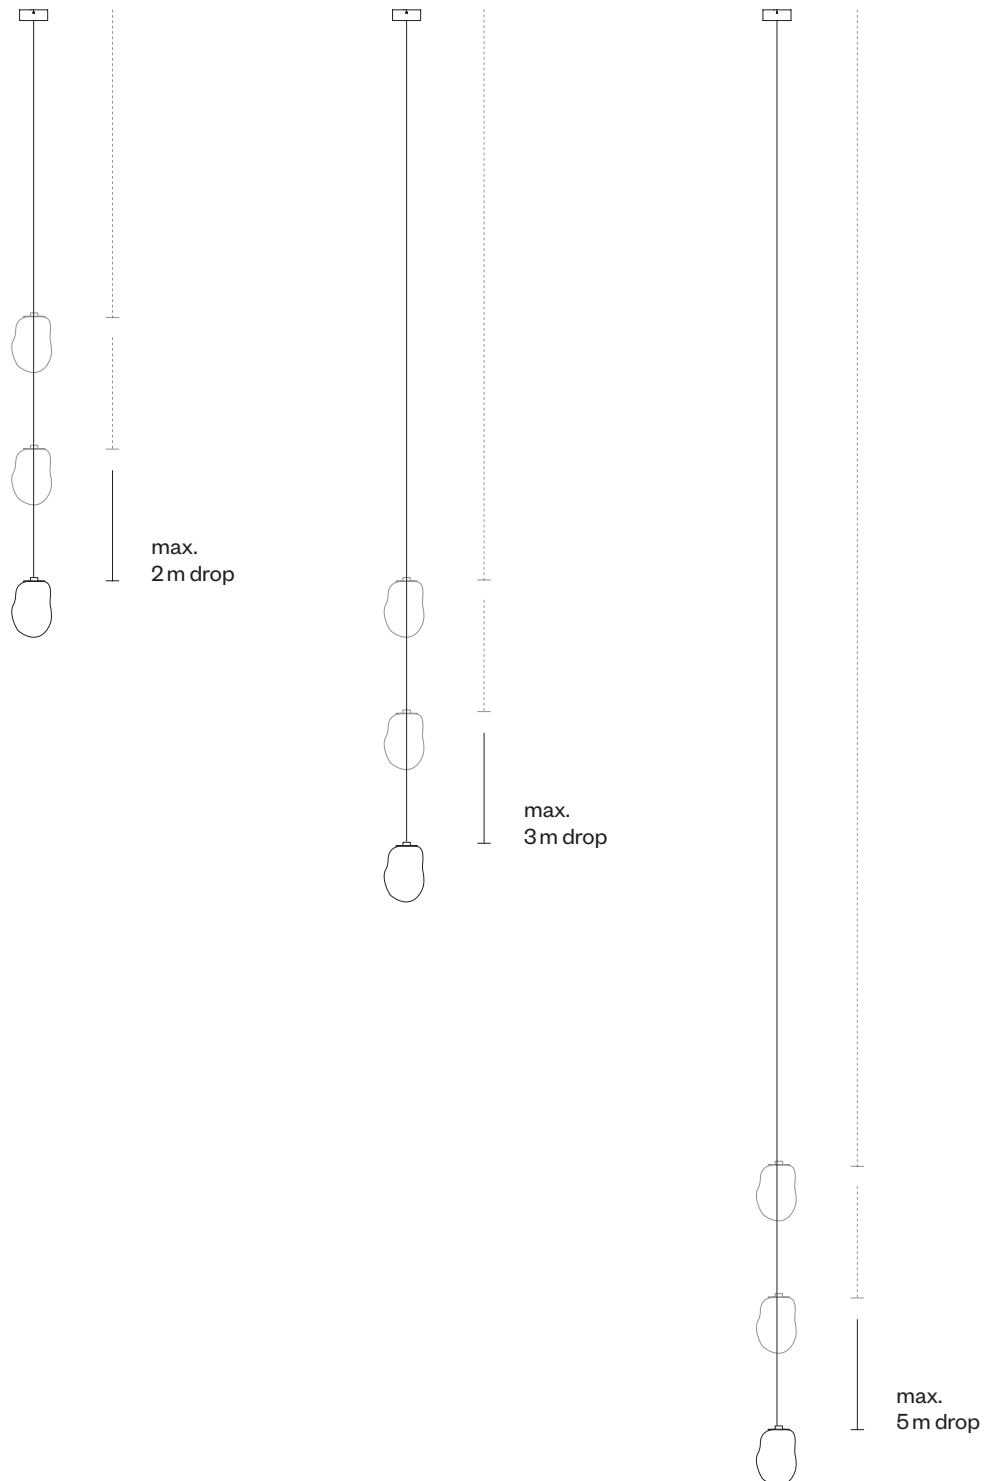



SINGLE PENDANT LIGHT

Lengths are individually adjustable. Available are 2000/3000/5000 mm

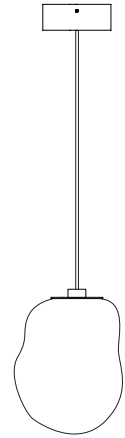



CLUSTER OF THREE

Lengths are individually adjustable. Available are 2000/3000/5000 mm

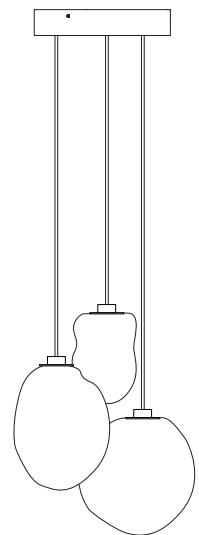



CLUSTER OF FIVE

Lengths are individually adjustable. Available are 2000/3000/5000 mm

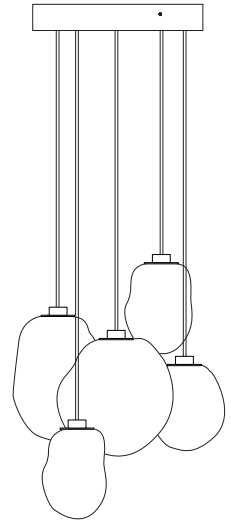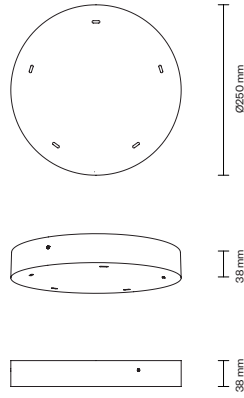

CLUSTER OF FIFTEEN

Lengths are individually adjustable. Available are 2000/3000/5000 mm

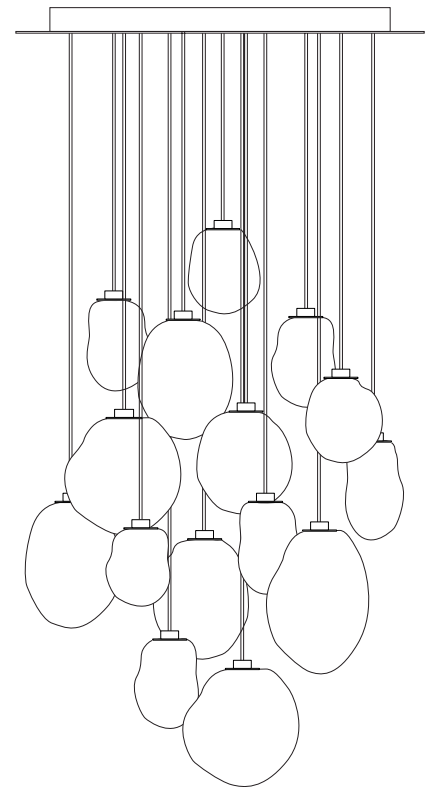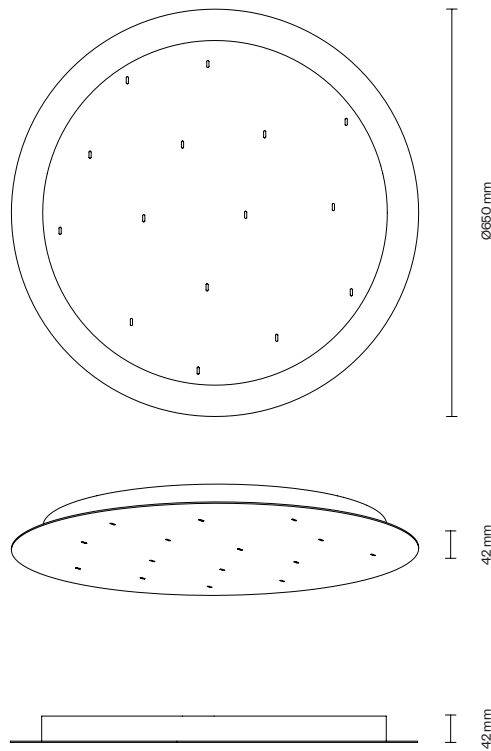


TECHNICAL  
SPECIFICATIONS


## PENDANT COLOUR



clear



ember black



opaline white

## CANOPY FINISH

white powder  
coatedblack powder  
coated

## FIXTURE



polished aluminium

polished aluminium  
black anodized

## DETAILS

## AVAILABILITY

Production time of our lights can range from 4 – 6 weeks, depending on the amount of pendants.

## SHIPPING

We ship our products with FedEx. Shipping is insured. The price varies with the scope of delivery. Shipping costs will be charged to the buyer. If you have a particular carrier you prefer to work with, please let us know and we will schedule the delivery accordingly.

INDIVIDUAL  
REQUESTS

We can manufacture custom-made canopies and suspensions after consultation. We are happy to help you with your clients' individual requests and challenges.

LIGHTING

light source	passive cooled 6 × 1 W Osram High-Power-LEDs
efficiency	111 lm/W
max output	784 lm
color temp	2700 K (optional: 5000 K)
color rendering	> 92 (typ.)
dimming	Smooth dimming operation (0)1 – 100%*

SYSTEMS

BASIC	non-dimmable (pre-equipped with 0 – 10V interface)
ELV/TRIAC	Dimming via leading-edge or trailing-edge dimmer *
SMART	available: DALI, KNX, Casambi, ZigBee, EnOcean

CONFIGURATIONS

	1PENDANT (EU)	1PENDANT (US)	3PENDANTS (EU)	3PENDANTS (US)	5PENDANTS (EU)	5PENDANTS (US)	15PENDANTS (EU)	15PENDANTS (US)	DECENTRAL SYSTEM (EU)	DECENTRAL SYSTEM (US)
BASIC (NON-DIMMABLE)	●	●	●	●	●	●	●	●	●	●
ELV/TRIAC	●	●	●	●	●	●	●	●	●	●
SMART — DALI	○	○	●	○	●	●	●	●	○	○
SMART — KNX	○	○	●	○	●	●	●	●	○	○
SMART — CASAMBI	○	○	●	○	●	●	●	●	○	○
SMART — ZIGBEE	○	○	●	○	●	●	●	●	○	○
SMART — ENOCEAN	○	○	●	○	●	●	●	●	○	○

STANDARD CONFIGURATION
  CUSTOM SOLUTION MAY BE AVAILABLE UPON REQUEST

EU: for 220/230 V and 50/60 Hz electricity supply e.g. Europe, Asia and Africa \*\*  
 US: for 110/120 V and 50/60 Hz electricity supply e.g. North and South-America \*\*