

The LOLA light by Gonzalz Haase embodies contemporary design, hand-crafted from quality materials like polished aluminum and mouth-blown glass. These versatile pieces can function as wall lighting or stand-alone tabletop lamps. Multiple pieces can be combined to create illuminated patterns.




FACTSHEET

LOLA

LIGHT

ANALOG

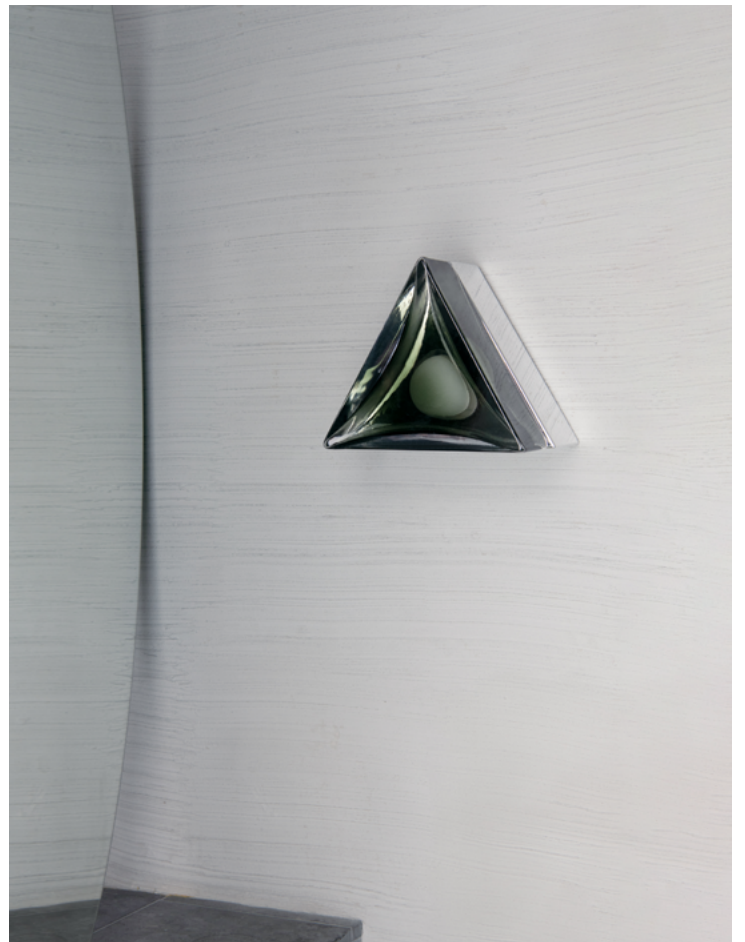

The LOLA light, part of Judith Haase's "spatial objects" series, is a fusion of architecture and furniture. Multiple units can be combined to create illuminated patterns, serving as architectural elements.




DISCLAIMER

Please keep in mind, that the LOLA lights are individually handblown by our skilled glassblowers. Therefore measurements of the body can vary.


LOLA WALL LIGHT

Cable lengths are individually adjustable. Available are: 2000/3000/5000/7000 mm

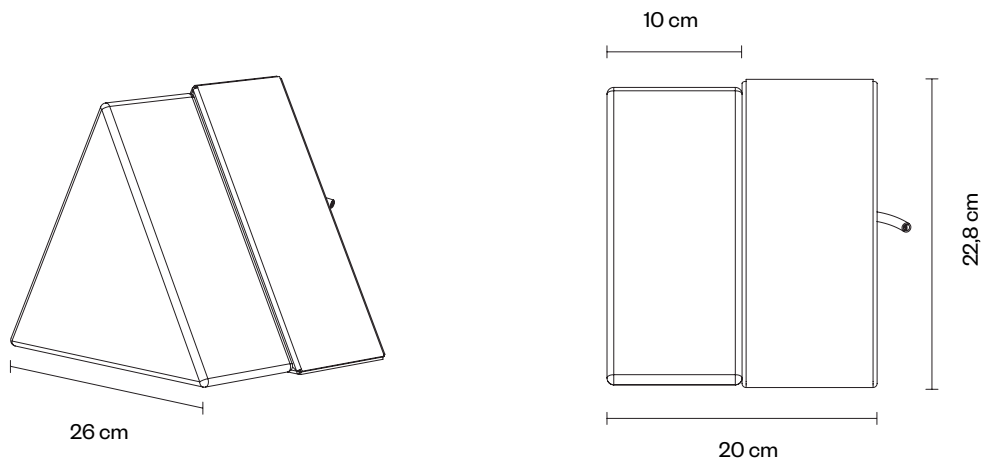


LOLA FLOOR LIGHT

Cable lengths are individually adjustable. Available are: 2000/3000/5000/7000 mm

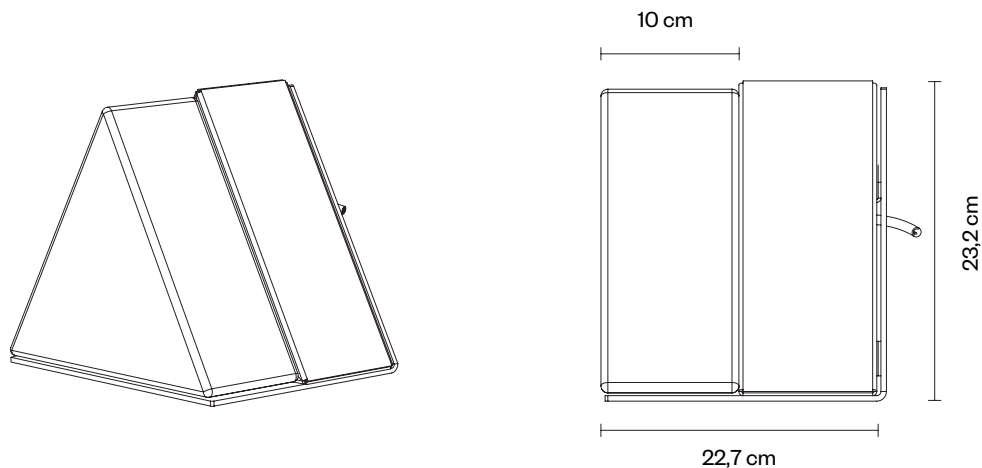

TECHNICAL
SPECIFICATIONS


BODY




clear



smokey grey




pink



red

ENCLOSURE



polished aluminium

DETAILS

AVAILABILITY

Production time of our lights can range from 12–16 weeks. If the chosen configuration is readily available, an earlier delivery may be possible.

SHIPPING

We ship our products with FedEx or DHL. Shipping is insured. The price varies with the scope of delivery. Shipping costs will be charged to the buyer. If you have a particular carrier you prefer to work with, please let us know and we will schedule the delivery accordingly.

INDIVIDUAL
REQUESTS

We can manufacture custom-made lights after consultation. We are happy to help you with your clients' individual requests and challenges.

LIGHTING

Our fixtures are fitted with a passive cooled 17 W LED-module

LIGHT-SOURCE	Bridgelux Vero
EFFICIENCY	111 lm/W
MAX. OUTPUT	~ 1500 lm
COLOR TEMPERATURE	2700 K (optional: 5000 K)
COLOR RENDERING INDEX	> 97 (typ.)
DIMMING	Smooth dimming operation (0)1-100 %* With Smart- or Touch-Dim-Version

DIM TO WARM

Available upon request

LIGHT-SOURCE	Bridgelux Vesta
EFFICIENCY	97 lm/W
MAX. OUTPUT	~ 1150 lm
COLOR TEMPERATURE	1800-3000 K (variabel)
COLOR RENDERING INDEX	> 95 (typ.)
DIMMING	Smooth dimming operation (0)1-100 %* With Smart- or Touch-Dim-Version

SYSTEMS

BASIC	Non-dimmable (pre-equipped with 0-10 V interface)
ELV/TRIAC	Dimming via leading-edge or trailing-edge dimmer*
TOUCH	Touch dimming
SMART	Casambi, ZigBee, DALI

CONFIGURATIONS

	LOLA WALL LIGHT	LOLA FLOOR LIGHT
BASIC (NON-DIMMABLE)	●	
ELV/TRIAC	●	
TOUCH		●
SMART — ZIGBEE	●	●
SMART — CASAMBI	●	●
SMART — DALI	○	○

STANDARD CONFIGURATION
 CUSTOM SOLUTION MAY BE AVAILABLE UPON REQUEST

EU: for 220/230 V and 50/60 Hz electricity supply e.g. Europe, Asia and Africa **
 US version may be available upon request.

Canopies come with adjustable cables. (2000/3000/5000 mm standard / up to 7000 mm maximum)

* Dimmer must be provided by customer. There may be compatibility problems between the dimmer and the LED driver. Ask us for the best compatible dimmer.
 ** Lookup for your country or ask us.